



Simple and Secure
2 parts only!

I-Fit

— *Single ferrule fitting
for stainless tubing* —



IHARA SCIENCE CORPORATION

I – Fit

1. Features

Two parts: body and nut. (The ferrule is integrated with the nut.)

※ Some parts have three components. For details, please refer to the specifications below.

Construction problems such as dropping/losing ferrules and wrong-way insertion are eliminated to **zero**.

Two types are available: **Nut Full Tightening type** and **rotation control type** (optional).

3/4 and 1 inch sizes reduce tightening torque by about **30%** and are ideal for **weldless pipe installation**.

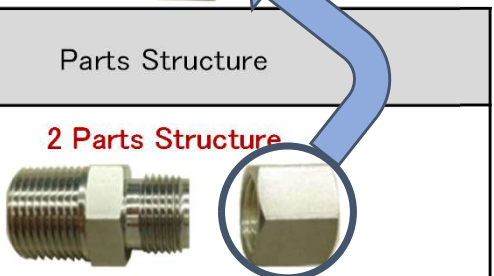

2. Specifications Sizing • Rated pressure • Material • Structure etc.

① Sizing

inch : 1/8, 1/4, 3/8, 1/2, 3/4, 1 (ϕ 3.18, ϕ 6.35, ϕ 9.52, ϕ 12.7, ϕ 19.05, ϕ 25.4)

Metric : 6mm, 8mm, 10mm, 12mm, 16mm, 20mm, 22mm, 25mm

② Rated Pressure • Parts Structure

Inch	Metric	Rated Pressure	Parts Structure
1/8, 1/4, 3/8, 1/2	6, 8, 10, 12	21 MPa	<p>2 Parts Structure</p>  <p>Body • Assembly Nut (Material: SUS316)</p>
3/4	16, 20, 22	14 MPa	<p>3 Parts Structure</p>  <p>Body • Single Ferrule • Nut (Material: SUS316)</p>
1	25	10.5 MPa	

③ Design temperature :

- 100°C ~ + 300°C

(※) Through turning the nut, ferrule comes off and swages onto tube.



④ Others

The fitting body can be used with the conventional 'Bi-Lok: Double Ferrule type fitting'.

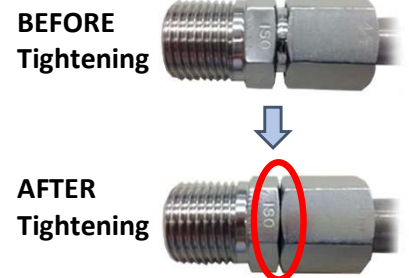
[Nut Full Tightening type]

- Nut tightening control is not required!
- Simple • Secure work! (Can visually check the completeness of tightening)

Just tighten the nut fully until reaching the body!

Anyone will realize 『Simple, secure, Higher work efficiency by 30%』

Ideal for utility (equipment piping) and other areas where there is no removal.



3. Specification As an option (rotation control type)

Can be used as a rotation control type by replacing the nut/ferrule.

The tightening method (including re-tightening method) for 1-1/4 turns from the Finger Tight Position is the same as previous products.

4. Part Number

M AI CT S 10M — R4 SS

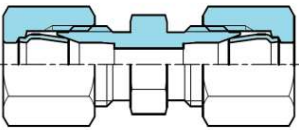
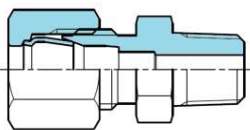
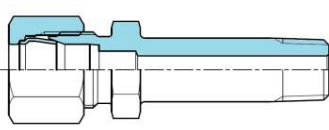
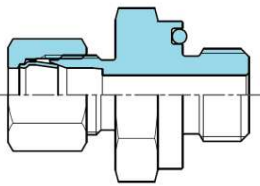


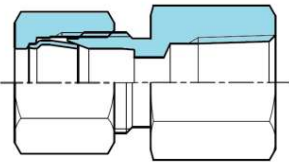

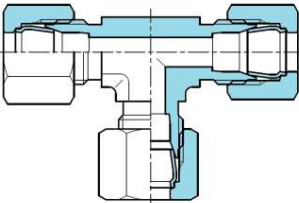
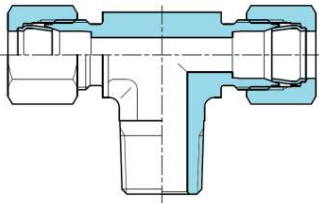

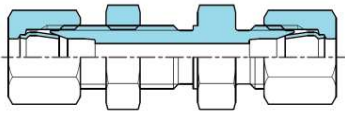
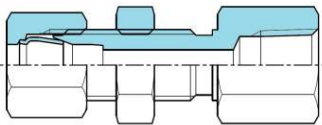

① Sizing symbol : _____ ⑥ Thread symbol

② Type symbol : _____ ⑤ Tube size symbol

③ Shape symbol : _____ ④ Type symbol

① Sizing symbol	⑤ Tube size symbol				⑥ Thread size symbol	
M : Metric Blank : Inch	Inch size		Metric size		Symbol	Size
	Symbol	Size Inch	Symbol	Size Metric		
② Type symbol	AI : I-Fit	2	6M	6	※4	1/4
		4	8M	8	※6	3/8
③ Shape symbol	Refer to visual index	6	10M	10	※8	1/2
		8	12M	12	※12	3/4
		12	16M	16	※16	1
④ Type symbol	Nut full tightening type only indicated with "S"	16	20M	20	※= No Mark : NPT R : R thread G : G thread	
			22M	22		
			25M	25		

5. Products Visual Index

Union : AIUA 	Male Connector : AICT 	Long Male Connector : AICC 	G thread Connector : AICO 
Elbow Union : AILA 	Male Elbow Nipple : AILN 	Female Connector : AISA 	O-ring Gasket type Elbow Nipple : AILO 
Union Tee : AITA 	Branch Tee : AITN 	Cap : AICA 	Bulkhead Union : AISU 
Female Bulkhead Socket : AISS 	Assembly Nut : AINF  Inch size : 1/8~1/2 Metric size : φ6~φ12		

As with Bi-Lok fittings, other shapes are available as well. Please contact us for details.

Why are double ferrule type fittings used for stainless tubing?

Which one is better for you?

Conventional
Double ferrule type



Nos of parts: 4ea

“ I-Fit ”



Nos of parts: 2ea

※Please contact us for further details, handling instructions and other questions.



イハラサイエンス株式会社
IHARA SCIENCE CORPORATION

ISO 9001/ISO14001 Certified Plants (DNV certification)

【Head Office】

11-3 Takanawa 3-chome Minato-ku, Tokyo 108-0074 Japan
TEL: +81-3-6721-6981 FAX: +81-3-6721-6991

【USA】

17971 Sky Park Circle, Suite B Irvine, CA, 92614 USA
TEL: 949-387-3727 FAX: 949-387-3739
Email: info@iharascience.com



Warning

If you don't select and handle fittings, valves and related accessories in an adequate manner, it may injure human beings and damage applicable systems. Within the responsibility and authorization of users and piping designers, fittings, valves and related accessories shall be adequately selected, assembled, used and maintained based on the applicable conditions and product conformity to the system to be applied. Please read our operation manual carefully and feel free to contact us if you have any questions or requests.

WARRANTY CLAUSE

1. Warranty Period

The warranty period of the products is one (1) year from start of use or one and half (1.5) years after delivery whichever comes earlier. However, the products with special specification and/or the cases used deviating from the design specification shall be exempted.

2. Scope of Warranty

Any failure and damage under maker's responsibility found during the warranty period, the substitutes and/or replacement parts shall be provided free of charge. The warranty shall not be applied to a claim for the liquidated damages.